




## Service Bulletin

**Subject:** Orange light on ProCal Snap with harness installed

**Applicable Models:** 2019+ Ram HD trucks using the AEV ProCal Snap

**Condition:** Orange light on with harness plugged in and ignition in RUN, possible odd behavior from vehicle such as auto steps not working

**Diag/Repairs:** Certain trim levels of Rams have more than one green Star connector. If this is the case, one will have a single row of plugs while the other will have two rows; the harness needs to be plugged into the two-row connector as shown.

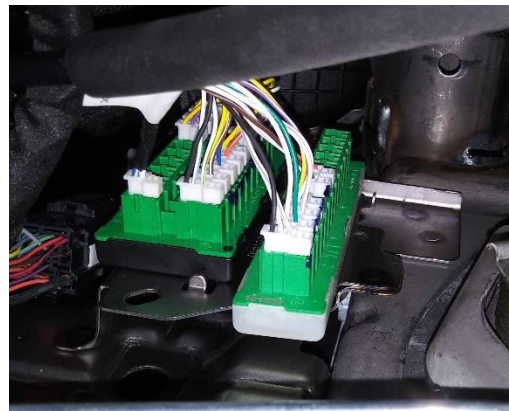

In order to remove the white plug and move it over to the other Star connector, there is a small retaining tab off to the side inside the square without wires in it. The tab needs to be pushed towards the wires in order to remove the plug.

