




# CORDURA SEAT COVERS

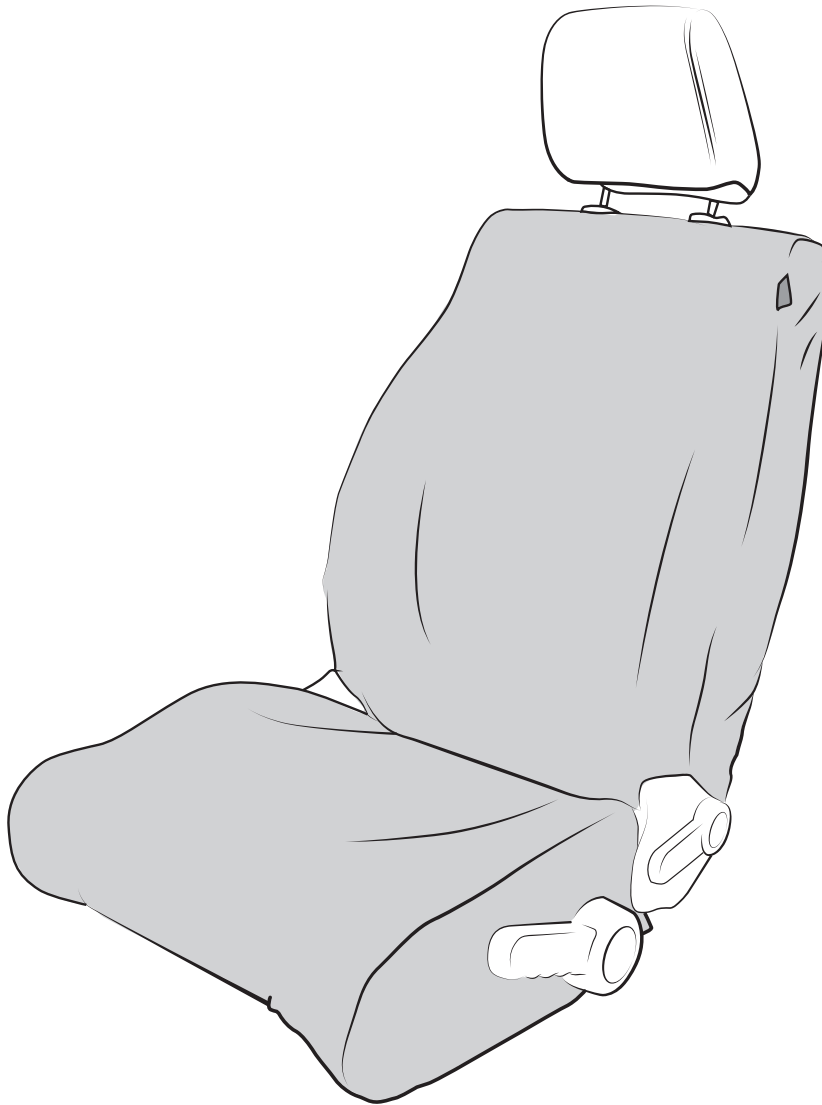

AEV30208AB  
Last Updated: 03/06/13

INSTALLATION GUIDE



## PLEASE READ BEFORE YOU START

TO GUARANTEE A QUALITY INSTALLATION, WE RECOMMEND READING THESE INSTRUCTIONS THOROUGHLY BEFORE BEGINNING ANY WORK. THESE INSTRUCTIONS ASSUME A CERTAIN AMOUNT OF MECHANICAL ABILITY AND ARE NOT WRITTEN NOR INTENDED FOR SOMEONE NOT FAMILIAR WITH AUTO REPAIR.

**NOTE: These Seat Covers are not recommended for use on vehicles with side air bags, may adversely affect performance.**

INCLUDED PARTS	QTY	REQUIRED TOOLS
<b>Front Seat included parts:</b>		None
Front Driver Bottom Cover	1	
Front Driver Back Cover	1	
Front Passenger Bottom Cover	1	
Front Passenger Back Cover	1	
<b>Rear Seat included parts:</b>		
Rear Driver-side Bottom Cover	1	
Rear Driver-side Back Cover	1	
Rear Passenger-side Bottom Cover	1	
Rear Passenger-side Back Cover	1	



## FRONT SEATS


### DRIVER AND PASSENGER BOTTOMS

Pull cover into place around seat cushion and feed the tail flap (A) between bottom cushion and backrest.

Feed the wide velcro straps (B) under seat and attach to the tail flap behind the seat.

Feed thin velcro straps (C) under seat, over seat slide, and secure to the velcro on the tail flap.

Smooth cover over seat with your hands and refasten velcro to tighten. Trim excess velcro if desired.

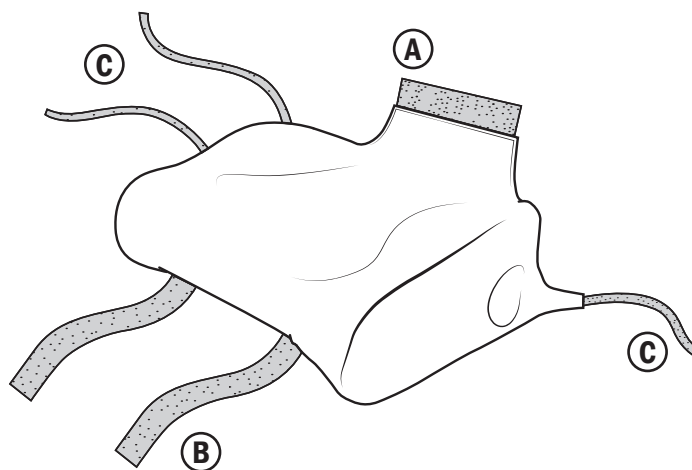


### DRIVER AND PASSENGER BACKS

Remove headrest and pull cover into position with velcro straps in front. Cover will be snug, inch down by pulling at alternating sides to avoid damaging seams.

Tuck fabric around circular cut-outs (A) under plastic headrest bezels.

Feed velcro straps (B) between seat cushion and back rest and attach them to the velcro inside the back of the seat cover (C).

Smooth cover top to bottom to eliminate wrinkles and refasten velcro to tighten.

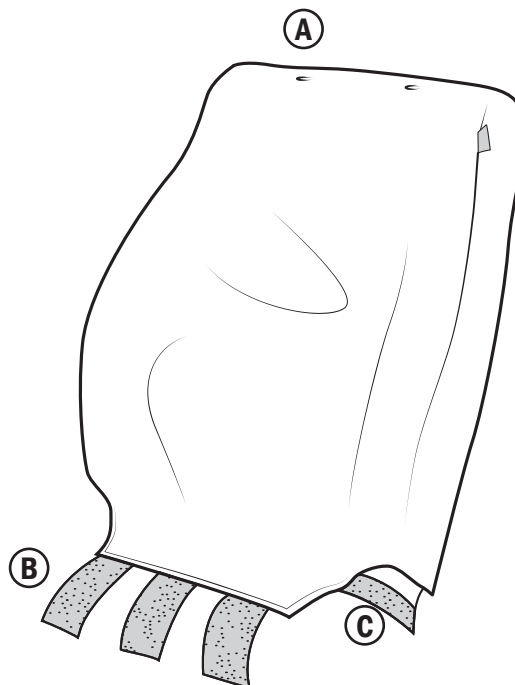



## REAR SEATS


### DRIVER-SIDE AND PASSENGER-SIDE BOTTOMS

Pull cover into place around seat cushion and tuck the tail flap (A) between bottom cushion and backrest.

Feed the wide velcro straps (B) under seat and attach to the tail flap behind the seat.

Feed thin velcro straps (C) under seat and secure to the velcro on the tail flap.

Smooth cover over seat with your hands and refasten velcro to tighten. Trim excess velcro if desired.

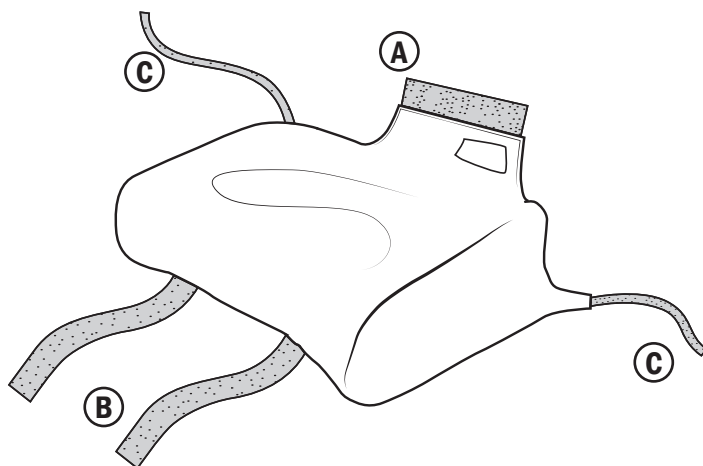

### DRIVER-SIDE AND PASSENGER-SIDE BACKS

Pull cover into position with velcro straps in front. Feed top flaps (A) under and around headrest.

Attach the velcro closure down the back and connect the straps from flaps (A) inside the back to the receiving velcro (B).

Feed bottom flap (C) between seat and back cushions. Attach velcro closure down the back and connect the straps from flap inside the back to the receiving velcro.

Smooth cover to eliminate wrinkles and refasten velcro to tighten.

#### **! IMPORTANT NOTE !**

2007 and 2013 models require modification to the outer shoulder. Turn inside out and cut out the square marked and noted "CUT HERE".

