




USER GUIDE | JL WRANGLER & GLADIATOR

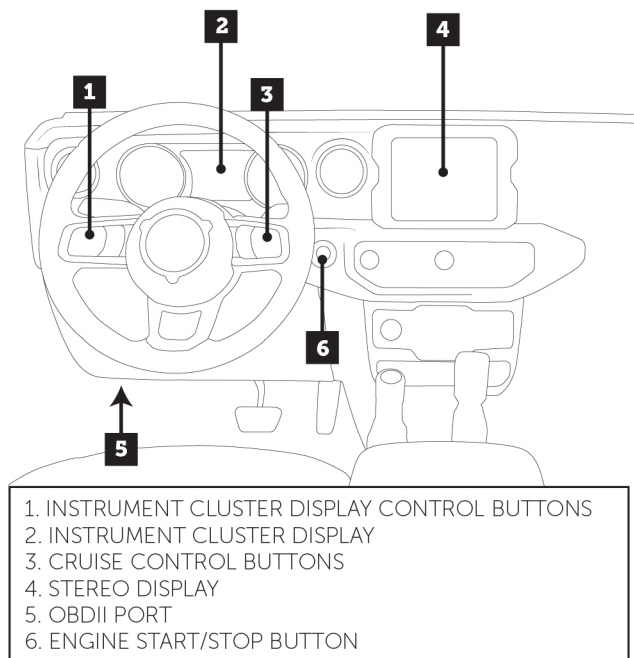

OVERVIEW


The AEV ProCal SNAP is a simple, easy to use electronic recalibration module for Jeep JL Wrangler and Gladiator. ProCal SNAP has the ability to recalibrate your vehicle's speedometer to compensate for non-factory tire sizes, replacement axle gear ratios and aftermarket or different transfer case gear ratios by simply plugging into the OBDII diagnostic port and inputting the numerical values using the stereo's audio equalizer.

PLEASE read these instructions completely before attempting to use this module. Follow these order of operations:


1. Install the included **AEV ProCal Harness** using instructions from aev-conversions.com.
2. Pair ProCal SNAP to the vehicle.
3. Recalibrate vehicle with ProCal SNAP

NOTE: The ProCal SNAP does not record the changes into your vehicle's history with FCA/Jeep. Any Warranty or Recall that requires a re-programming of the modules may erase the ProCal SNAP settings and require you to use the ProCal SNAP to adjust your settings again.


PAIR PROCAL SNAP TO VEHICLE




Press 2 times to put into the "RUN" position.



Insert ProCal SNAP into the OBDII port.



Wait for a blinking GREEN light on the SNAP and a blinking BRAKE light on the speedometer.



With your foot on the brake, PRESS and HOLD the CRUISE ON/OFF button for 3 SECONDS.

NOTE: The ProCal SNAP must be paired to a vehicle before it will recalibrate any settings. Once completed, the ProCal SNAP will be **permanently locked to this vehicle**.


- 5 **HONK! HONK! HONK!** When the pairing process is complete, the horn will sound quickly 3 times. Your ProCal SNAP is now paired and ready to recalibrate your vehicle.

SETTING EQUALIZER


Adjust the stereo's EQUALIZER SETTINGS to the values you wish to set (be sure the stereo source is set to AM/FM).

Always enter the values in order: Bass, Mid, Treb.

- Example: 34.2" Tires, Bass = 3, Mid = 4, Treb = 2.

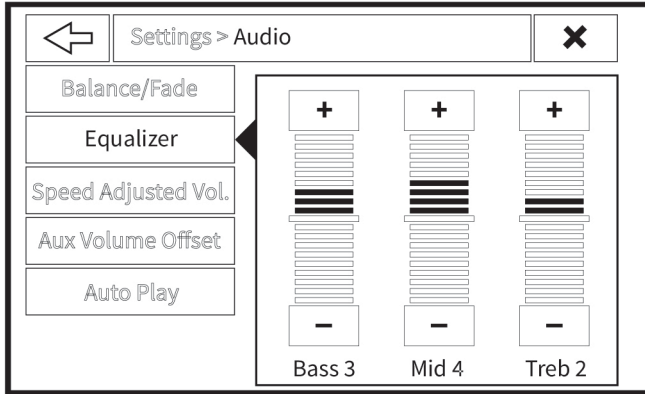



UCONNECT 4 and 4C

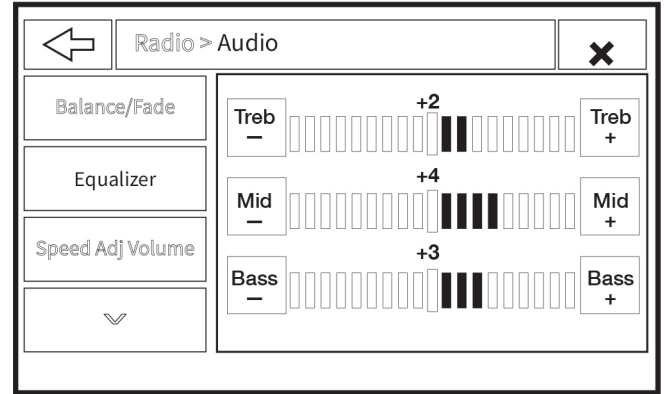


UCONNECT 3

EXAMPLE: TIRE SIZE


To recalibrate Tire Size: Begin by physically measuring your tire diameter IN INCHES from the ground to the top of front tire with the vehicle level and on the ground.



Press 2 times to put into the "RUN" position.








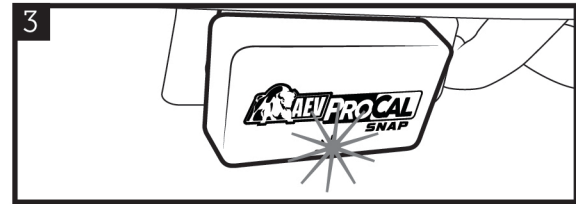





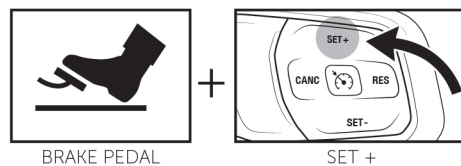



Insert ProCal SNAP into the OBDII port.



Wait for a solid GREEN light on the SNAP.

- 4 Set the EQ values for the tire size (Example: 34.2" Tires, Bass = 3, Mid = 4, Treb = 2.). Press the combination below. PRESS and HOLD for 3 SECONDS. Programming is complete when the horn sounds twice. Unplug ProCal SNAP and store in vehicle.



FUNCTION	DESCRIPTION	EQ EXAMPLE	COMBINATION
TIRE SIZE	When setting Tire Size, use the actual height measurement, not the rated size.	34.2" Tires B: 3, M: 4, T: 2	 +  BRAKE PEDAL SET +
AXLE RATIO	The physical ratio of gears in your differential. Do not modify unless you have changed gears.	4.10 Axle B: 4, M: 1, T: 0	 +  BRAKE PEDAL RES
TRANSFER CASE	The physical ratio of gears in your Transfer Case. Do not modify unless you have replaced the transfer case.	3.80 T-Case B: 3, M: 8, T: 0	 +  BRAKE PEDAL SET -
TPMS	Nominal pressure for your tires. The indication light shuts off at this value, and will turn on when one tire is 75% of this value. RANGE: 30-50psi	32 PSI B: 0, M: 3, T: 2	 +  BRAKE PEDAL CANCEL
RESTORE	Set values back to original settings. This does not unpair the module from this vehicle.	—	 +  +  BRAKE PEDAL PULL HIGH BEAM CRUISE ON/OFF
CLEAR DTC CODES	Attempts to clear important trouble codes. Can only clear non-active errors.	—	 +  +  BRAKE PEDAL PULL HIGH BEAM RES

VIEW SETTINGS

If you wish to view the current settings, you can do so on the Instrument Cluster Display. Insert the ProCal SNAP into the OBDII port. Turn the radio off and use the Instrument Cluster Display Control Buttons to navigate to AUDIO. The Instrument Cluster Display will cycle through showing the current setting for **Tire Diameter**, **Axle Ratio**, and **4Low Ratio**.

TROUBLESHOOTING

Q: No light on the ProCal SNAP.

A: Contact Support.







Q: The light was solid green, I attempted to program something, there was no honk and now the ProCal SNAP has a fast pulsing blue light.

A: Turn the radio off. Use the Instrument Cluster Display Control Buttons to navigate to AUDIO. Record the error message and contact AEV support with the information shown.

Q: What if I don't have a factory stereo?

A: Contact AEV support, some aftermarket radios could still function properly. We'll be able to advise you before trying.

DIAGNOSTIC CODES

-  **BLINKING GREEN:** ProCal SNAP ready to pair
-  **SOLID GREEN:** ProCal SNAP paired and ready
-  **SLOW PULSING ORANGE:** Waiting for vehicle ignition to be turned to RUN.
-  **SLOW PULSING BLUE:** Inserted into incorrect vehicle.
-  **FAST PULSING ORANGE:** No connection. Check that the harness is properly installed.
-  **FAST PULSING BLUE:** There has been an error in programming. Turn the radio off. Use the Instrument Cluster Display Control Buttons to navigate to AUDIO. Record the error message and contact AEV support with the information shown.

AEV Customer Support: (248) 926-0256

Email: tech@aev-conversions.com